

Fact Sheet

Industrial PC iS75

BIZERBA

This full-fledged industrial PC is ideally suitable to be used in harsh ambient conditions. The robust multi-touch display in stainless steel design provides safe operating convenience in HD quality. The network-capable high-end solution is also impressive in terms of its multi-function: You can reliably control, count and check your production and record data.



More informationen
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Housing	Front Housing	Plastic Stainless steel 1.4301
Protection type	IP65 IP69	All-round protection against dust and water All-round protection against dust and water, suitable for high pressure / steam-jet cleaning
Ambient temperature	Operation: 0 °C - 40 °C	
Display	TFT display with LED backlight	Diagonal: 54.68 cm/21.5" Full HD resolution: 1,920 x 1,080 pixels 16 million colors
Touch screen	Projective capacitive touch (PCT)	– Multi touch operation – Splinter protection film laminated onto entire surface – High scratch resistance for use in harsh industrial environments
Processor	Intel® Core™ i5 6300U	2.4 GHz
RAM	4 GB	DDR3 SO-DIMM RAM
Data storage	128 GB	CFast flash memory
Operating system	Windows 10 Pro	64 bit The Microsoft license terms apply: https://www.microsoft.com/en-us/Useterms/Retail/Windows/10/UseTerms_Retail_Windows_10_English.htm
Interfaces	5 x USB 2 x Ethernet 1x Internal Wi-Fi module 2 x serial interfaces 1 x serial interfaces XXX	4 x USB 3.0, outward routed, 1 x USB 3.1 RJ45, 10/100/1000 Mbit Dual band 2.4/5 GHz 2 x RS232 as DSUB-9, 1 x RS232/422/485 via BIOS XXX RJ10
Mains supply	100-240 V Alternatively 24 V DC	50/60 Hz
Options	Facts	Details
RFID	RFID USB module	Transmitting frequency: 125 kHz; 13.56 MHz
Device holder	– Foot – Stand – Wall mounting / ceiling mounting – Customer-side – Rittal adapter	Stainless steel Stainless steel Stainless steel via VESA 100
Industrial software	– Formulating, dosing, batching – Counting	BRAIN2 Formulation _counting.BRAIN

Symbols






protection
class IP65



protection
class IP69

Dimensions

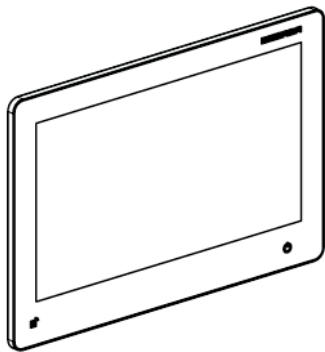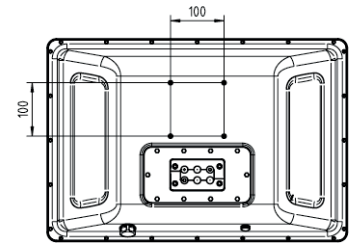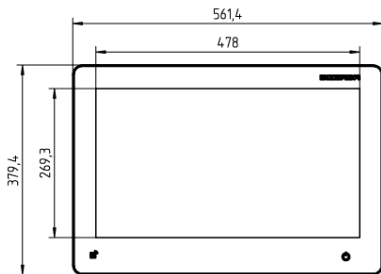

Bizerba SE & Co. KG

Wilhelm-Kraut-Straße 65
72336 Balingen
Germany

T +49 7433 12-0

F +49 7433 12-2696

marketing@bizerba.com

www.bizerba.com